

# TANE ALARM PRODUCTS



**\$50 - 1 Guarantee Since 1984**

**Magnetic Contacts • B Connectors • Strobes • Drill Bits • Sirens  
Shock Detection • BNC Connectors • Passive Infrareads • Signs/Decals**

Cameras for Surveillance purposes - For camera pricing and ordering please contact us at:

906 Jericho Turnpike, New Hyde Park, NY 11040  
800-852-5050 / 516-328-3351 / Fax: 516-326-9125  
[www.tanealarm.com](http://www.tanealarm.com) / [info@tanealarm.com](mailto:info@tanealarm.com)

# TANE ALARM PRODUCTS

## Industrial and Automotive Contacts Since 1979, Alarm Contacts Since 1984

A magnetic door or window contact is the first line of defense in any burglar alarm application. Since **1984 Tane Alarm Products has earned the respect of the alarm industry, as the installer's choice** for alarm contacts. The industry's best guarantee (explained below) is based on the fact that Tane uses only the best reed switches available. Our reeds have been tested over 400,000,000 cycles, **but more importantly**, they are able to sit idle for years in an unused door or window; and then operate that one critical time when a break-in occurs. Tane is one of the few remaining companies with magnetic alarm contacts as our primary business. Tane's focus has been and continues to be, manufacturing the very best magnetic alarm contacts for the alarm industry.

## The Best Guarantee Since 1984: \$50-1

We guarantee NO STICKING and NO FALSE ALARMS. If during the normal use of TANE(TAP) contacts, you have a false alarm, we will replace the defective switch with \$50 in credit upon return of the defective switch. (If contact fails at installation we will replace it with \$20 in credit after-installation \$50). This warranty is good for the life of the installation, but does not cover sticking due to high voltage surges or lightning. (For such a rare occurrence TANE will replace that contact two for one.) **The reason for such a strong warranty is due to the continued testing of our reeds in both independent labs as well as in the field.** Our reeds have been rated to over 400 million operations without sticking, and have been used in Electronics, Military and Automotive applications since 1979. Please call us for a detailed brochure on either our reed switches or test reports. UL BP-4702. (Returns may be subject to a shipping and handling fee. Returns outside the USA and Canada are guaranteed \$20-1. All "EX" marked contacts come with a \$5-1 guarantee. All non-contact products are guaranteed for 1 year.



## CONTACT RATINGS

TAP contacts are available with different electrical characteristics for unusual requirements

Contact	Standard	High Voltage	High Power	S.P.D.T
Contact resist. (Initial) [m-ohms]	150 max.	150 max.	150 max.	150 max.
Breakdown voltage [DVC]	250 min.	300 min.	300 min.	200 min.
Insulation resistance [ohms]	10 <sup>10</sup> min.	10 <sup>10</sup> min.	10 <sup>10</sup> min.	10 <sup>9</sup> min.
Electrostatic cap [PF]	0.3 max.	0.2 max.	0.5 max.	1.5 max.
Contact capacity [VA]	10	20	70	3
Max. Conductive curr. [A]	1.0	2.0	2.5	0.5
Max. Voltage [V]	100	250	100	30



Most Contacts can be made open loop, closed loop, SPDT, DPDT at your request. All contacts are made with "standard" reeds except for SPDT and Open Loop.

Higher current and voltage available upon request.

Parts list and specifications are subject to change without prior notice.

Since 1984



"We Contact The World"®

**TANE ALARM  
PRODUCTS**

906 Jericho Turnpike  
New Hyde Park, NY 11040  
800-852-5050 / 516-328-3351  
Fax: 516-326-9125  
www.tanealarm.com  
E-MAIL: info@tanealarm.com

	STYLE	SIZE	Pkg.Size	FEATURES	GAP	PAGE
	3/8" Recess	3/8" x 3/4" 3/8" x 1 1/4" 3/8" x .54"	10	3 Sizes Available Bare Magnet Option Tight Fit Magnet Option	3/4"	7
<b>STB-10</b>						
	3/8" Recess 3/8" Mini Recess	3/8" x 3/4" 3/8" x 9/16"	10	Thin Magnet Tight Fit Magnet	1/2" 1/2"	7 8
<b>STB-10/MINI-10 DM</b>						
	3/8" Recess	3/8" x 1 1/2"	10	Thin Switch & Magnet	3/4"	9
<b>TAP-10</b>						
	3/8" Quick Connect ( Terminals )	3/8" x .98"	10	Quick Connect	5/8"	9
<b>STB-3/8 TC</b>						
	1/4" Recess	1/4" x 1" 1/4" x .54" 1/4" x 1" Flange	10	Short Magnet Option	3/4"	10
<b>TAP-15</b>						
	Stubby Press Fit 3/4" Steel Door 1/2" Diameter	1/2" x 3/4" 3/4" x .8" 1/2" x 3/4"	10	Terminal Option Shorter Magnet Contact Magnet	1 1/2"	10
<b>SD-70/80</b>						
	3/4" Quick Connect ( Terminals )	3/4"Dia. x 1 3/16"L	10	Steel Door Type With Terminals	1"	10
<b>TANE-3/4 TC</b>						
	3/4" Stubby Reed Button Ball	3/4" x 3/4"	10	12" Leads Free Spacer Easy Terminal Option	NA	11
<b>TANE-22TC &amp; 22</b>						
	3/4" Reed Rollerball	3/4" x 1 5/8"	10	Special Plastic Resists Dirt 12" Leads with Spacer	NA	11
<b>RB-32</b>						
	Reed Button	3/4" x 1 1/3"	10	Free Spacer 12" Leads or Easy Terminal Connect	NA	12
<b>PB-52 &amp; PB-52 TC</b>						
	3/8" Adjustable Reed Button	3/8" x 1"	10	12" Leads Adjustable Head	NA	12
<b>TANE-3/8 ASH</b>						
	1/4" Recess	1/4" x 9/16"	10	Thin Fit	1/2"	13
<b>MINI-15</b>						
	Ultra Thin Disc	.60" x .24"	10	Ultra Thin	NA	13
<b>Mini-Disc</b>						
	1/4" Oval Flange	1/4" x 1"	10	3/8" Flange	3/4"	13
<b>RFM-25</b>						
	Surface Mount	1.33" x .3" x .53"	10	Flange Mount & Adhesive	1"	14
<b>FM-102</b>						
	Flange Mount Self Stick	1.33" x .3" x .53"	10	1" Gap Vent Mag Available Side Lead Option	1"	14
<b>FM-106</b>						




NOTE: ALL TANE SWITCHES ARE RATED 1/2 AMP - 30 VOLTS

**800-852-5050**  
E-MAIL: [info@tanealarm.com](mailto:info@tanealarm.com)



**516-328-3351**  
FAX: **516-326-9125**

3-TANE

	STYLE	SIZE	Pkg.Size	FEATURES	GAP	PAGE
	Surface Mount	2"L x .38"H x 0.38"W	10	Center Lead Contact & Magnet with Recessed Screw Mount	3/4"	14
<b>TANE-55</b>						
	Surface Mount Quick Connect	2" x 3/8" x 1/4"	10	3/4" Gap Easy Mount Terminals Strong Adhesive Thin Design	3/4"	15
<b>TANE-60</b>						
	Surface Mount Quick Connect	1 7/8" x 1/2" x 3/8"	10	3/4" Gap Quick Connect Terminals Strong Adhesive	3/4"	15
<b>TANE-50</b>						
	Surface Mount Quick Connect	2 1/2" x 1/2" x 1/2"	10	Free Spacers Screws, Cover Std Gap 7/8" Wide Gap Option	1"	16
<b>SM-35</b>						
	Surface Mount Quick Connect	2" x 1/2" x 3/8"	10	Hidden Screw & Wires 1"	1"	16
<b>GP-23</b>						
	Miniature Type Mini Surface Mount	1 1/16" x 3/16" x 1/4" 1/2" x 1/4"	10	Super Stick Wide Gap Option Ideal For Tight Fit Windows	.60"	16
<b>TANE-45</b>						
	Surface Mount	1.10"L x .38"W x .20"H	10	Oval Mount Contact and Magnet (Center Leads)	3/4"	17
<b>TANE PILL</b>						
	Contact and Magnet Miniature Type Mini Surface Mount	1.4" x .31" x .31"	10	Super Stick Wide Gap Option Ideal For Tight Fit Windows	3/4"	17
<b>SS-40</b>						
	Ultra Thin Surface Mount	1.2"L x 1/4"W	10	"Fits On A Dime"	3/8"	17
<b>TANE MICRO</b>						
	Commercial Contact	2" x 5/8" x 3/8"	1	Available with 18" wire or 18" & 36" Armored cables Metal Switch & Magnet	1 1/4"	18
<b>MET-200</b>						
	Wide Gap Commercial	4 1/8" x 5/8" x 5/8"	1	Gap 2 1/2"	2 1/2"	18
<b>SM-20</b>						
	Metal Cased Overhead Door Contact	2.47" x 4.22"	1	Available 18" & 36" Armored cable	2 1/2"	19
<b>MET-44</b>						
	Track Mount Contact	3.07" x 2.60"	10	Available 18" & 36" Armored cables 4 Way Magnet Bracket	2 1/2"	19
<b>TANE-66</b>						
	Metal Cased Mini Overhead Door Contact	1.35" x 2.10" x .37"	1	Available 18" & 36" Armored cables Ultra Small Half Ind.Std.Size	2 1/2"	20
<b>TANE-86 Mini</b>						

NOTE: ALL TANE SWITCHES ARE RATED 1/2 AMP - 30 VOLTS

**800-852-5050**  
E-MAIL: [info@tanealarm.com](mailto:info@tanealarm.com)




**516-328-3351**  
FAX: **516-326-9125**

*"We Contact The World"®*

	STYLE	SIZE	Pkg.Size	FEATURES	GAP	PAGE
	EZ-Mount Track Mount Contact	3.75" x 2.04"	1	Bi-Directional Mounting	2 1/2"	20
<b>TANE-96 BI</b>						
	CCTV Signs Lawn Signs Window Decals	In-Stock and Custom Ovders		Choose from a variety of shapes and sizes	NA	21
<b>LAWN SIGNS</b>						
	Mini Sizes	2"H x 3"W	10	Great Price Small Size Very Bright		21
<b>Strobe</b>						
	SCS-101 SIR-202 BOX-WSPR66A SIR-5FL SIR-508	Five Styles	1	Self Contained Style Stand Alone Style Stainless Steel Dual Tamper Flush Mount Dual Indoor 30 Watt Horn Siren		22 22 22 23 23
<b>Sirens</b>						
	SPK-202 SCH-101 SPK-506 SPK-5FL	Four Styles	1	Sell Contained Speaker Flush Mount Speaker 30 Watt Speaker/Horn Stand Alone Speaker/Horn		23 24 24 24
<b>Speakers</b>						
	Connectors	Twelve Types	10	BNC Connectors and Adaptors		25
<b>BNC Connectors</b>						
	Crimp Tool Kit	Coax Crimp Tool with Accessories	1	5 Die, Stripper and Cutter TN-Crimp Tool Kit		25
<b>Coax Crimp Tool Kit</b>						
	PIR-360A	4 5/8"W x 1 1/4"H	1	Ceiling Mount 360°		26
<b>PIR 360A</b>						
	IR-2026 IR-2026Q IR-25120	Three Styles	1	Passive Infrared Detector Quad Style Infrared Detector Digital Pet Immune		27
<b>PIR'S</b>						
	ESA-350 MA-100T SD-1,SD-2 SD-3,SD-4	Four Styles	5	3-Zone Analyzer Single Zone Analyzer Flush & Surface Mount Shock Sensors		28
<b>Shock Sensors</b>						
	Cable & Wire Raceway	3/8" x 5/8" x 5'	5	Cable & Wire Raceway for Low Voltage Applications		28
<b>E-Z DUC-IT Raceway</b>						
	RJ-31 Block and Cord RJ-31 DUAL	Standard Size	1	Complete with 18" Cord Part #TJ-8 Complete with 2 male Connectors Part #TJ-8 DUAL		29
<b>Telephone Block</b>						
	Ground Clamp	Standard Size	25	Easy to Use Zinc with SS Bolts (Brass Option Available)		29
<b>Ground Clamp</b>						
	Pistol Pad	9"L x 6"W x 1.75"H	1	Tamper Resistant Alarm Initiation Platform		29
<b>Pistol Pad</b>						


NOTE: ALL TANE SWITCHES ARE RATED 1/2 AMP - 30 VOLTS

**800-852-5050**  
**E-MAIL: info@tanealarm.com**



**516-328-3351**  
**FAX: 516-326-9125**

**"We Contact The World"®**

	STYLE	SIZE	Pkg.Size	FEATURES	GAP	PAGE
	Push Pull Disconnect	1" Each Side	25	White, Brown, Gary & Clear Corrosion Resistant Tension Relief Hole		29
<b>PPD 11</b>						
	Electrical Tape Tie Wraps	3/4"W x 65'L 8"	10 100	UL LISTED Black & White		29 29
<b>Accessories</b>						
	Various Bits	Assorted Sizes	5	Spade Bits Bell Hanger Bits Long Flexible Bits		30
<b>Paddle Bits</b>						
	Jambstick	Fits 3/4" Holes	1	Ensure Proper drilling angle		30
<b>Jambstick</b>						
	Magnets	Various	50	Choose from 10 sizes		31
<b>MAGNETS</b>						
	B Connector	Standard Size	1K	Dry or Gel Filled Brass & Beryllium Copper Plated with Bright Nickel		31
<b>B Connectors</b>						
	Water Sensor Accessories	2 1/2"L x 1/2"W x 1/2"H	5	Water Sensor with 6' Leads Connects to box similar To a 2-wire Smoke Alarm		31
<b>TANE WS-1</b>						
	2 Sizes Available	3/8" & 3/4"	Varies	Pre-Wire Plugs		31
<b>Pre-Wire Plugs</b>						
	Tane Plug-in Transformers	Standard Size	1	Special Order Only		32
<b>Tane Transformers</b>						
	Tane Upscale Multi-Function Utility Tool with Free Pouch		1	Multi-Function Utility Tool		32
<b>Tane Utility Tool</b>						
	Environmentally-friendly Road-hazard Warning		1	Battery Powered 5 way Flash Red, Blue, Yellow Bright LED's		32
<b>Tane Safety Flasher 2.0</b>						
	TV-330 CCTV Tester	6.5"H x 3.5"W x 1.9"D	1	Test Camera Video PTZ Function UTP cable Multi-Meter Function		33
<b>TV-330 CCTV Tester</b>						
	TV-700	5.9"H x 7.87"W x 2.55"D	1	NTSC/PAL Auto Detect 7" Color TFT LCD		34
<b>TV-700 Test Kit</b>						
	9 Models Available		1	Field Tested Low-light Color Indoor & Outdoor Models		35
<b>CCTV-Cameras</b>						

NOTE: ALL TANE SWITCHES ARE RATED 1/2 AMP - 30 VOLTS

**800-852-5050**  
E-MAIL: [info@tanealarm.com](mailto:info@tanealarm.com)



**516-328-3351**  
FAX: **516-326-9125**

*"We Contact The World"®*

# RECESSED CONTACTS

## STB - 10 • 3/8" x 3/4" Stubby Type

- The "Stubby" recess is ideal for those who do not need to spend extra money on the Mini Recess. Gap:0.70"

Contact: 3/8" x 3/4"

Magnet: 3/8" x 3/4"

Mini Mag available for tight fits.

White, Brown



12" lead std. Longer leads available

### ORDERING INFORMATION

Closed Loop .7" Gap	For Tight Fit Windows Closed Loop 1/2" Gap	Closed Loop 1 1/3" Gap	Open Loop 1/2" Gap	Bare Magnets	Extra Mag
STB-10	STB-10 W MINI-10 Mag	STB-10SWG	STB-11	See Page 30 For available sizes	STB-10 Mag



## Crush Resistant and Sensitive

Tane uses a sensitive long leaded - no stick Rhodium reed to attract the magnetic field. This is protected by a crush resistant plastic housing.

Solder points



Crush resistant button

# ULTIMATE TIGHT FIT

## STB-10 DM • Recess Contact with Thin 1/8" Magnet



White, Brown

\*Available with Flat Mag

12" lead std. Longer leads available

Gap: 1/2"

Contact: 3/8" x 3/4"

Magnet: 3/8" x 1/8" Donut Magnet:

- Ideal for tight fitting window frames where you can not drill a hole for magnet
- Convex hole lets a flathead screw fit flush!

**For very wide gap:**

Use Bare 3/8" x 3/4" Wide Gap Magnet  
Part Number STB - 10 WG

Gap: 1 1/4"

**For flat magnet:**

Use Bare 1" x 1/4" x 1/8" Flat Magnet  
Part Number STB-10 FLAT

Gap: 1/2" For flat magnet



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# RECESSED CONTACTS

## MINI-10 • 3/8" Mini-Recess Types



( A True Miniature Size)

**Size:** 3/8" x 5/8" Mini - 10

**Gap:** 1/2" to 1"

22 AWG, 12" Leads std.

Longer leads available

### ORDERING INFORMATION

Size	Closed Loop 1/2" Gap	Closed Loop 3/4" Gap	Closed Loop 1" Gap
Mini- 3/8"	Mini-10	Mini - 10 w/ STB - 10 Mag	Mini - 10 WG

- Ideal for tight fit windows
- Good for thin door frames
- Excellent for security screens
- Long leads available
- Shorter than all stubby contacts
- Versatile
- White or Brown

## MINI-10 DM • Mini Recess with 1/8" Tight Fit Magnet



**Gap:** 3/8"

**Contact:** 3/8" x 5/8" Mini

**Magnet:** 3/8" x 1/8" Doughnut Magnet

12" leads std. Longer leads available

- The Mini -10 DM is ideal where not only the magnet is tight for space, but also where the contact must be smaller
- Tane's 3/8" x 1/8" powerful magnet has a convex hole drilled so a flat head screw fits flush!

**For very wide gap:**

Use Bare 3/8" x 3/4" Magnet

Part Number MINI - 10 WG

**Gap:** 1"

White, Brown



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**


906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# RECESSED CONTACTS

## TAP - 10 • 3/8" Diameter Contact and Magnet

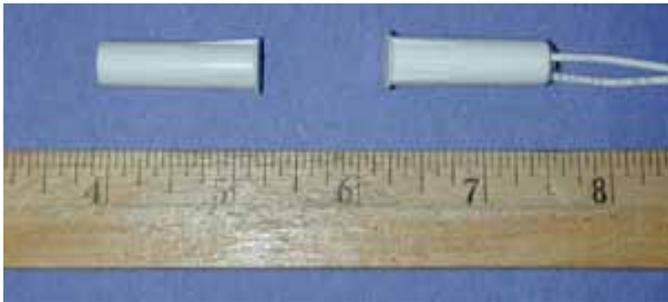

**Gap:** 3/4" - 1 1/2"  
**Size:** 3/8" Diameter x 1 1/4" Length  
 #22 AWG, 12" leads std.  
 Longer leads available  
 White, Brown




### ORDERING INFORMATION

					For 3/8" Flange	
Closed Loop 3/4" Gap	Closed Loop 1" Gap	Open Loop 3/4" Gap	S.P.D.T.	Closed Loop 1 1/2" Gap	Closed Loop 3/4" Gap	Open Loop 3/4" Gap
TAP - 10	Incher Tap-10	TAP - 11 B	TAP - 12 C	TAP - 10 WG (w/Bare 3/8" x 3/4" Magnet)	TAP - 10 FM	TAP - 11 BFM

Available in Brown or White      Add "R" for Resistor + Value

**\*Available with a Bare Magnet of any size\***

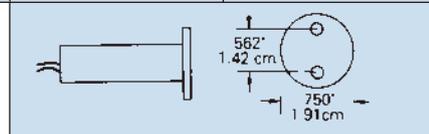

# QUICK TERMINAL CONNECTORS

## STB - 3/8 TC • 3/8" Recessed Terminal Quick Connect



**Size:** 3/8" Diameter x .98" Length

**Gap:** 3/4" to 1"

- For Fast and Easy Installation
  - No more soldering or splicing needed
  - No need to push beanies behind walls through small holes


Shorter magnets .57L sent as a standard  
 White, Brown



### ORDERING INFORMATION

Closed Loop 3/4" Gap	Closed Loop 1" Gap	Closed Loop 1 1/2" Gap	Closed Loop 1 1/2" Gap
STB - 3/8 TC (comes with 3/8" x 9/16" standard magnet)	STB - 3/8 TC WG (comes with bare 3/8" x 3/4" magnet)	STB - 3/8 TC DM (comes with donut magnet)	STB - 3/8 TC FLAT (comes with flat magnet)

(Above available with smaller or bare thin magnets for applications in tight fitting window frames)

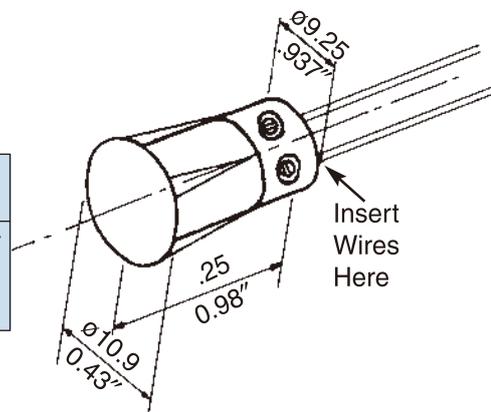

The Best Guarantee Since 1984 : \$50-1

## TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# RECESSED CONTACTS

## TAP - 15 • 1/4" Diameter Contact and Magnet




Gap: 3/4"

Size: 1/4" Diameter x 1" Length

Magnet: Magnet 1/4" x .79" Length

Gap Variations



### Ordering Information

Closed Loop	Open Loop	S.P.D.T.	Wider Gap	Shorter Magnet Available
TAP - 15	TAP - 16B	TAP - 17C	WG BT 3/8 X 3/4	

Available in Brown & White  
#22 AWG, 12" leads std. Longer leads available

## SD-70/SD-80 3/4" and 1" Diameter Contact and Magnet (Steel Door)



### New Stubby Style with 1 1/2" Gap




- Rugged one piece construction (No need for extra donut adapters)
- For standard and tighter fitting applications
- Sensitive "No stick" UL rhodium reed
- Long leads bent to keep solder off the glass of the reed
- Two Solder points on 22 AWG 7 stranded UL Wire
- Thick plastic shell to prevent crushing

### Ordering information 3/8" Press Fit Magnets Available

Size	Closed Loop	Open Loop	SPDT	DPDT 6 Wire	Closed Loop & Bare Magnet
3/4" Dia x .80	SD-70	SD-71B	SD-72C	SD-74C	SD-70 WG 3/8" x 3/4" Magnet
1" Dia x .80	SD-80	SD-81B	SD-82C	SD-84C	SD-80 WG 3/8" x 3/4" Magnet

Available in Brown , White  
12" Leads - 22 AWG, Long Leads Available  
Add "R" for Resistor + Value

## TANE-3/4TC 3/4" Terminal Connect Recessed Steel Door Recess Type

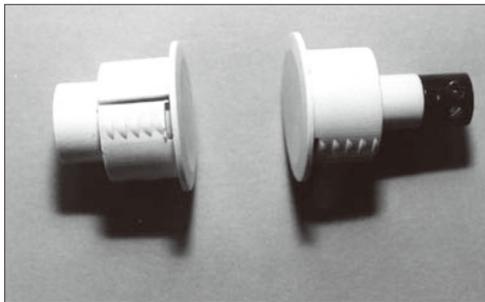


Tane - 3/4 TC: 3/4" Diameter x 1 3/16"  
Gap: 1"

- For fast and easy installations — No more soldering or splicing needed
- Stubby magnet 3/4" x .85"
- White, Brown

### Ordering information

Closed Loop 1" Gap	Open Loop 3/4" Gap	Closed Loop 3/4" Gap
TANE - 3/4 TC	TANE - 3/4 BTC	TANE - 3/4 TC w/TAP-10 MAG

Tane will substitute short magnets when requested  
(This is with 3/8" press fit magnet)

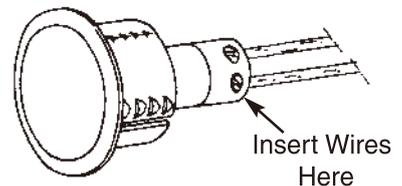

The Best Guarantee Since 1984 : \$50-1

# TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# RECESSED CONTACTS

## TANE-22TC/TANE-22 3/4" Stubby "Button Ball" Reed Contact



The TANE-22 series is available with 12" leads or a quick connect model for faster installations.


Longer leads available

- Complete with Spacer and Screws
- Shorter length for tight fitting areas

Length 3/4" from Flange to end on leaded TANE-22

Length 1 3/16" from Flange to end of terminals for TANE-22TC



White, Brown




### Ordering information

Style	Closed Loop
Wire Leads (12" std)	TANE-22
Terminal Connect	TANE-22TC

### TERMINAL CONNECT

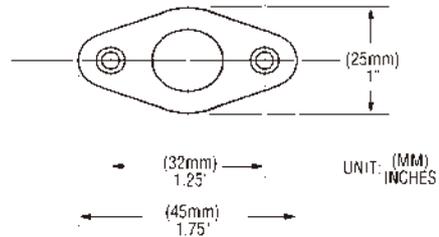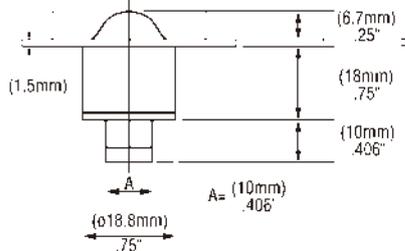

## RB - 32 • 3/4" Roller Ball Reed Contact

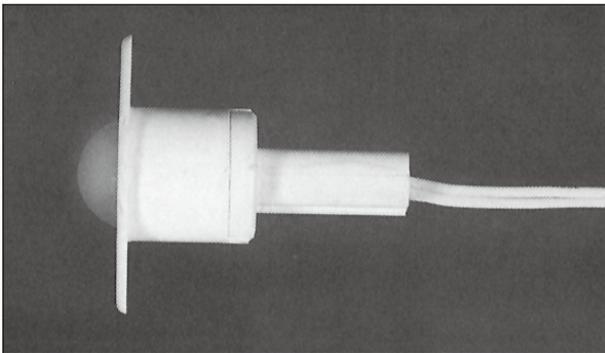

Complete with Screws and Spacer

This 3/4" roller reed ball contact uses a special compressed plastic ball to keep it dirt and paint resistant.

Standard Size 3/4" x 1 5/8"

- Complete with spacers and screws
- Thin end for easy installation
- De-activated Rhodium reed switch used
- 12" leads std. Longer leads available
- White, Brown



### Ordering information

Closed Loop	Open Loop	S.P.D.T.
RB-32	RB-33	RB-34



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com


# RECESSED CONTACTS

## Reed Plunger • PB-52 & PB-52 TC



To order specify White or Brown

- Ideal for replacing old mechanical contacts
- Good for door jams
- Reed technology for long life
- PB-52 with 12" leads std. Longer leads available
- PB-52 TC with terminal connects
- Complete with screws & spacers

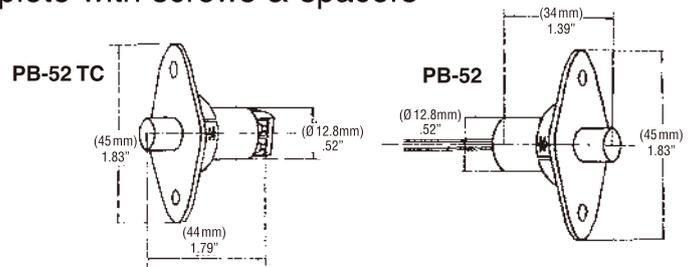

### Ordering Information

	Wire Leads	Terminals
Closed Loop	PB-52	PB-52TC


## TANE-3/8 ASH & RECESSED CONTACTS

### TANE-3/8 ASH (Adjustable Screw Head)



To order specify White or Brown

### Tamper Switch with Gap Adjusting Screw.

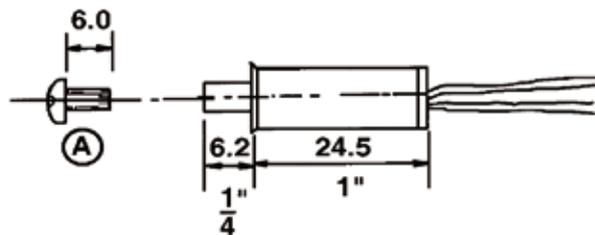

Unit: mm

12" leads std. Longer leads available

### Ordering Information

Closed Loop
Tane-3/8 Ash

The Best Guarantee Since 1984 : \$50-1



**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# RECESSED CONTACTS

## MINI - 15 • 1/4" Diameter Contact and Magnet



**Gap:** 1/2"

**Size:** 1/4" X 9/16"

**Magnet:** 1/4" x .54"

22 AWG, 12" leads std.

Longer leads available

26 AWG, Longer leads available

• Ideal for Screens

• White or Brown



### Ordering Information

Size	Closed 1/2" Gap	Closed 3/4" Gap
1/4" x 9/16"	Mini-15w/Bare 1/4" x .54"	Mini-15w/Bare 1/4" x .79"

## TANE MINI-DISC FL • Ultimate Thin Tight Fit Contact and Magnet




The Tane Mini-Disc is a unique contact as it has a wide gap for its slim size

**Gap:** up to .70" (18mm)

**Dimensions:** .60" (15mm) x .24" (6mm)

Flange is .71" (18mm)

22AWG:12" leads std. Longer leads available.

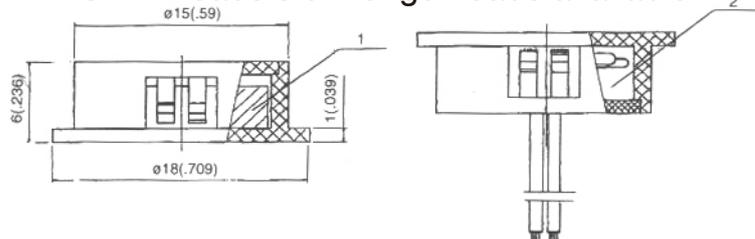

## RFM - 25 • 1/4" Diameter with Oval Flange and Magnet



Ideal for fitting in a track where a regular 1/4" would fall through

**Gap:** 3/4"

**Size:** 1/4" Diameter x 1" Length

**Magnet:** 1/4" Diameter x 1" Length

**Flange:** 3/8" Oval Shape

**Wire:** 22 AWG, 12", Longer Available  
White, Brown



### Ordering Information

Closed Loop	Open Loop	S.P.D.T	Wider Gap
RFM-25	RFM-26B	RFM-27C	WG



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**


906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# SURFACE MOUNT CONTACTS \*with special adhesive

## FM-102 • Flange Mount Contact and Magnet (Side Leads)

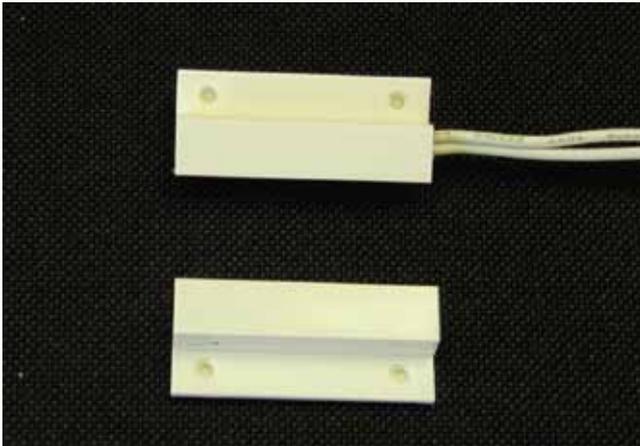

**FM:** Flange Mount with special adhesive  
**Size:** 1.33" L x .3" W x .53" H  
**Gap:** 1" minimum




### Ordering Information

Closed Loop	Open Loop	S.P.D.T.	Vent Mag
FM-102	FM-103	FM-104	FM-Mag

Brown, White, Tan, 12" Leads minimum (Longer Available)  
**This is our most economical surface mount with leads**

## FM-106 • Flange Mount Contact and Magnet (Center Leads)

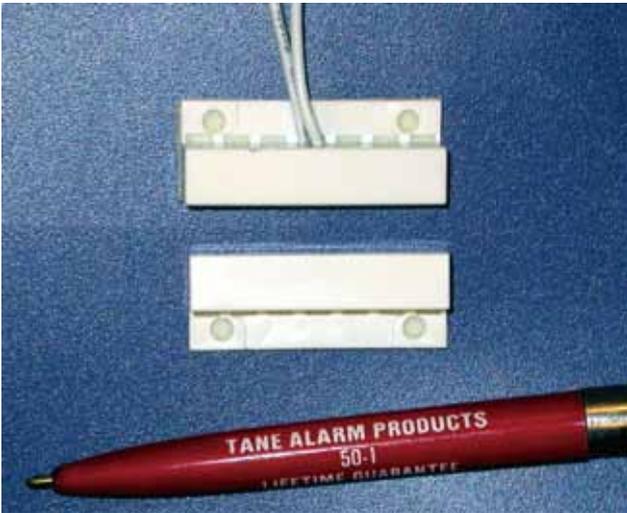

**FM:** Flange Mount with special adhesive  
**Size:** 1.33" L x .3" W x .53" H  
**Gap:** 1" minimum



### Ordering Information


Closed Loop	Open Loop	Vent Mag
FM-106	FM-107B	FM-Mag

Brown, White, Tan, 22 AWG,  
 12" Leads minimum (Longer Available)

*\*Special Adhesive on back*

FM-106 has a "Clean Break"  
 Flange Removal

## TANE-55 • Center Lead Contact & Magnet with Recessed Screw Mount

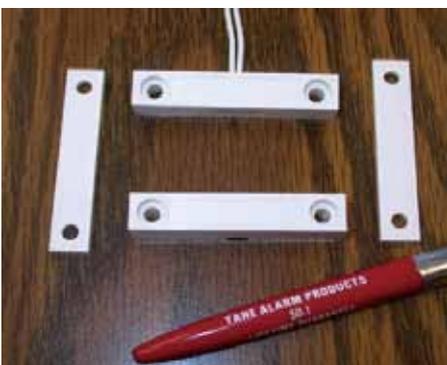

**Contact & Magnet:** L:2" x H:.38" x .37"  
**Gap:** 3/4" Minimum

**Colors:** White & Brown  
 12" leads std. Longer leads available



### Ordering Information

Closed Loop	Open Loop	S.P.D.T.	Vent Mag
TANE-55	TANE-56	TANE-57	TANE-55 MG



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICO TURNPIKE, NEW HYDE PARK, NY 11040  
 Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125  
 www.tanealarm.com • E-MAIL: info@tanealarm.com

# SURFACE MOUNT CONTACTS \*with special adhesive

## TANE-60QC • Quick Connect



### Features:

- Screw Down or *Super Adhesive*
- Break Away Features for Tight Fit
- Slim Style and Installer Easy
- Eliminates Need for 6' or 10' Leads
- TAPE Cover


**Gap:**  $\frac{3}{4}$ " minimum

**Colors:** White, Brown, Grey, Tan

**Carry Current:** 1 Amp

**Reed:** De-activated Rhodium

**Dimensions:** L: 2" x H:  $\frac{3}{8}$ " x W:  $\frac{1}{4}$ "



Housing Dimensions

### Ordering information

Closed Loop	Open Loop	Extra Mag	Closed Loop Wide Gap
TANE-60QC	TANE-61QC	TANE-62QC Mag	TANE-60QC WG

Comes complete with screws, covers & adhesive

## TANE-50 • Covered Screw - Quick Connect



The TANE-50 is clean looking, and easy to install!

**Gap:**  $\frac{3}{4}$ " minimum


**Colors:** White, Brown

**Reed:** De-activated Rhodium

- Mounting Screws included
- Adhesive tape included

### Ordering Information

Closed Loop	Open Loop	Extra Mag
TANE-50	TANE-51	TANE-50 Mag Only

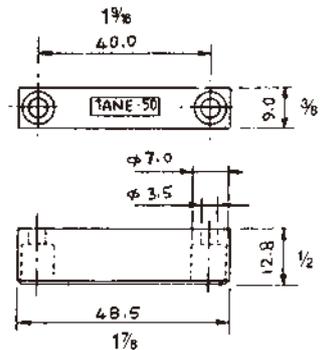

Comes complete with screws, covers & adhesive.



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**


906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# SURFACE MOUNT CONTACTS

## SM-35 • Surface Mount\* (Standard Industry Size)

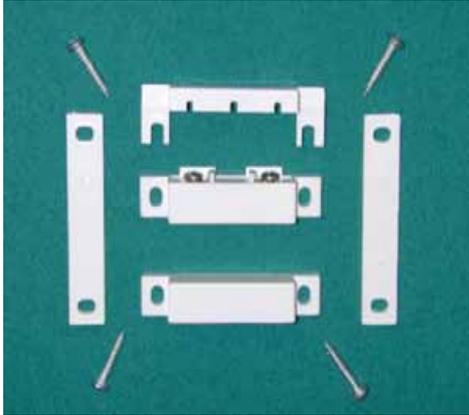

Gap: 1" to 2".

Color: White, Brown, Grey.

Size: 2 1/2" x 1/2" x 1/2"

Price includes spacers, screws, and cover




### Ordering Information

Closed Loop	Open Loop	S.P.D.T.	for 2" Gap	for Resistor
SM - 35	SM - 35 B	SM - 35 C	W.G.	add "R"

**SM-35 is available in 2" gap. The SM-35 WG is economical and ideal for heavy steel doors and commercial wide gap needs.**

## TANE GP-23 • Hidden Screw — Hidden Wire — Surface Mount

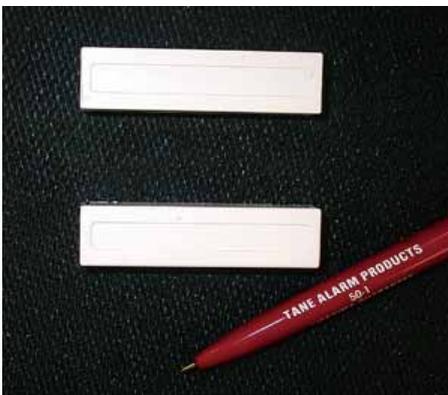

All screws are hidden and all wires can be hidden in this unique contact.

Gap: 1" (25mm) Standard

Color: White, Brown, and Grey


Size: L: 2" (51mm) x H: 1/2" (13mm) x W: 3/8" (9mm)

Ordering Information: *Add WG for Wide Gap*



	Closed Loop	Open Loop	Extra Mag
1" Gap	GP-23	GP-24	GP-23 MAG

## TANE-45 • SUPER STICK Miniature Type

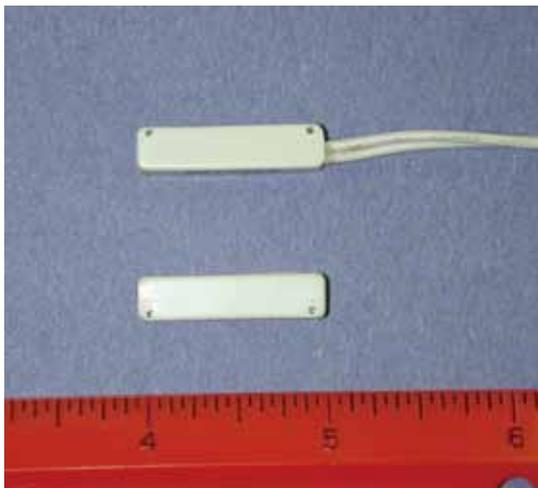

**\$50:1 Lifetime Guarantee**

The TANE-45 is ideal for areas where a small or slim contact is needed.

**MODEL TANE-45 has super adhesive that does not fall off, dry-off, or freeze-off.**

Size: 1 1/16" L x 3/16" W x 1/4" H

Gap: .60"

Color: White, Brown

#22 AWG, 12" Leads std.

Long leads available

### Ordering Information

Closed Loop	Vent Mag
Tane - 45	Tane - 45 Mag



The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

*"We Contact The World"*

# SURFACE MOUNT CONTACTS \*with special adhesive

## TANE PILL • 3 STYLES



### Ordering Information

Closed Loop	TANE PILL SL	TANE PILL	TANE PILL TC
Open Loop	TANE PILL SL B	TANE PILL B	TANE PILL TC B

Size: 1.10"L x .39"W x .20"H

Gap: .75"

Color: White, Brown, Tan


Adhesive: 3M

Wires: 12" 22 AWG zipped lead std.

Longer leads available

- Narrow width of the TANE PILL allows for window track installs without drilling into the frames.
- Clean fit on surfaces.

## SS-40 • SUPER STICK Contact and Magnet

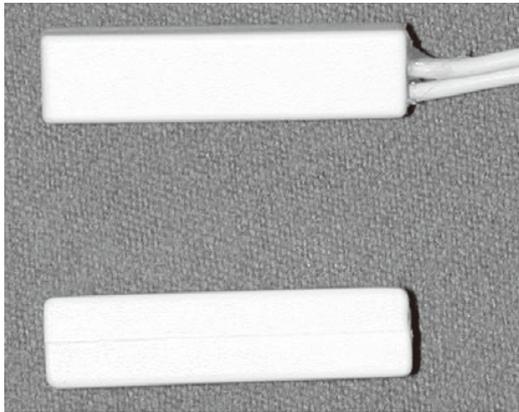

Size: 1.4" L x .31" W x .31" H

Gap: .75"

Color: White, Brown




### Ordering Information

Closed Loop	Open Loop	S.P.D.T.	Vent Mag
SS-40	SS-41B	SS-42C	SS-40 Mag

22 AWG, 12" Leads (Long Leads Available)

## TANE MICRO • Ultra Mini Surface Mount Contact

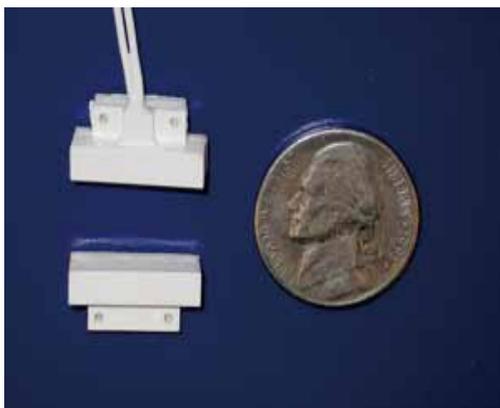


- Closed Loop
- Can be installed in the track of the window or surface mounted.
- Ideal for tight fit windows where a large gap is not needed.
- Perfect for windows that can not be drilled due to warranty issues.

Size: 1/2" L x 1/4" W

Gap: 3/8" "Fits on a dime"

Color: White, Brown, Tan

12" leads std. Longer leads available

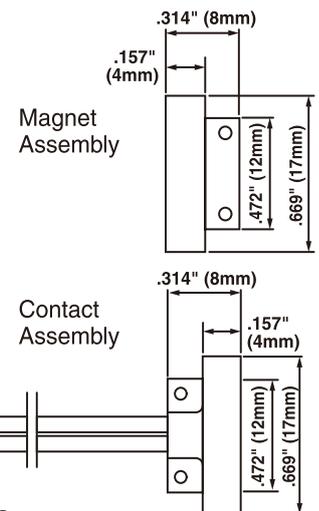

The Best Guarantee Since 1984 : \$50-1

# TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# COMMERCIAL SURFACE MOUNT CONTACTS

## MET-200 • Commercial Metal Contact

*Need Any  
Beanies?*

UL US LISTED

CE



**Wide Gap:** 1.25"

**Size:** 2" L x 5/8" H x 3/8" W

**Wire:** 22 AWG, 12" length wire, 18" & 36" armored cable available.

**Ideal for commercial applications and where a wide gap is needed.**

### ORDERING INFORMATION

Closed Loop	Open Loop
MET - 200	MET - 201
MET - 200AR for Armored Cable	MET - 201 AR

## SM-20 WG Commercial Surface Mount

UL US LISTED

CE



- Ideal for commercial or steel doors
- Wide gap to insure against swinging
- 18" 22 AWG, Jacketed leads std.
- Longer leads available

**Wide Gap:** 2 1/2"

**Size:** 4 1/8" L x 5/8" H x 5/8" W

**Color:** White, Brown & Grey

### Ordering Information

Closed Loop	Open Loop
SM - 20 WG	SM - 21 WG

The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

*"We Contact The World"*

# OVERHEAD/TRACK MOUNT CONTACTS

## MET-44 • Overhead Door Contact



- Industry standard size
- Adjustable "L" bracket, magnet can be installed 10 ways!
- Heavy duty armored cable in 18" or 36" length
- Exceeds industry standards!
- Gap: 2 1/2"

### Ordering Information

Closed Loop 18" Cable	Closed Loop 36" Cable	Open Loop 18" Cable	S.P.D.T. 18" Cable
MET - 44 - 18	MET - 44 - 36	MET - 45 - 18	MET - 46 - 18


## TANE-66 • Track Mounted Over Head Door Contact



- For Mounting on Door Tracks  
*"Fork lifts can't knock these off floors!"*
- 4 way adjustable magnet bracket
- Wider Gap for reduced false alarms
- Installs better and faster than standards overheads
- Armored cable is standard
- Closed Loop, open loop and SPDT types
- Gap: 2 1/2"
- 18" Armored cable std. 36" Armored cable available

### Ordering Information

Closed Loop	Open Loop	S.P.D.T.
TANE-66	TANE-67	TANE-68

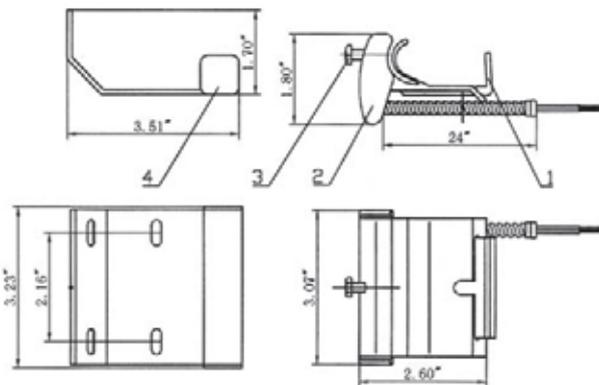

The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**


906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

# OVERHEAD/TRACK MOUNT CONTACTS


## TANE-86 Mini • Overhead Door Contact

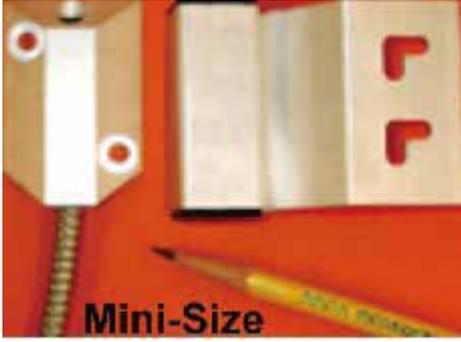

- Ultra-Small Size:  
Switch 1.35" W × 2.10" L × .37" H  
Magnet 2.12" W × 2.6" L × 1.19" H
- 18" and 36" Armored Cable Available
- W-I-D-E 2.5" GAP
- Adjustable Magnet-Bracket
- Minimal Dead Zones
- Closed Loop, Open Loop, SPDT Types

**NEW Product**

**UL US LISTED**  
PENDING  
**CE**

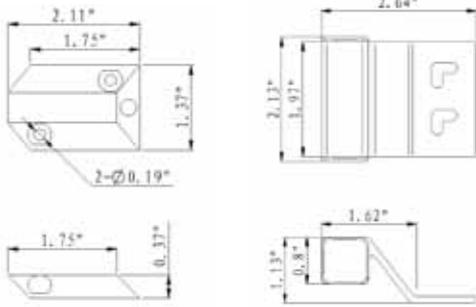

### Ordering Information

Closed Loop	Open Loop	S.P.D.T.
TANE-86 Mini-18 TANE-86 Mini-36	TANE-87 Mini-18 TANE-87 Mini-36	TANE-88 Mini-18 TANE-88 Mini-36


## TANE-96 Bi • Bi-Directional Track-Mount Door Contact



- For Mounting on Door Tracks  
*"Fork Lifts can't knock these off floors"*
- Adjustable magnet and Contact for installs on either the left or right side of the door
- Minimal Dead Zones
- W-I-D-E 2.5" GAP
- 18" and 36" Armored Cable Available
- Closed Loop, Open Loop, SPDT Types

**NEW Product**

**UL US LISTED**  
PENDING  
**CE**

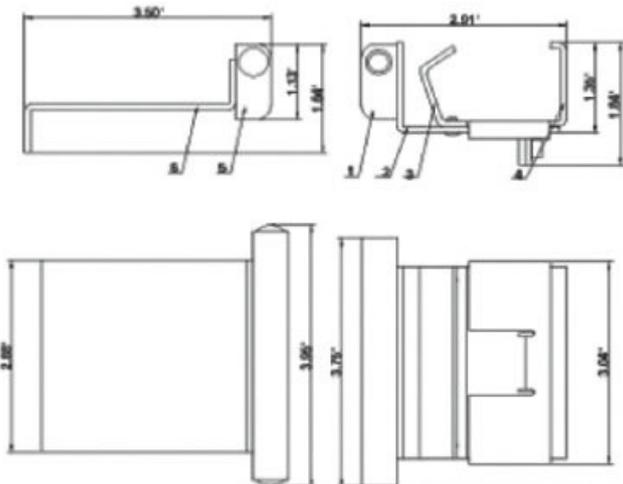

- Ordering Information:

Available in 2 sizes to fit Residential or Commercial Tracks:

Use TANE-96 BI for 2 1/2" RESIDENTIAL TRACKS

use TANE-96 BI LG FOR 3 1/2" COMMERCIAL TRACKS

Closed Loop	Open Loop	S.P.D.T.
TANE-96Bi-18 TANE-96Bi-36 TANE-96Bi LG-18 TANE-96Bi LG-36	TANE-97Bi-18 TANE-97Bi-36 TANE-97Bi LG-18 TANE-97Bi LG-36	TANE-98Bi-18 TANE-98Bi-36 TANE-98Bi LG-18 TANE-98Bi LG-36

**"We Contact The World"®**

The Best Guarantee Since 1984 : \$50-1

**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com